



# Plungers

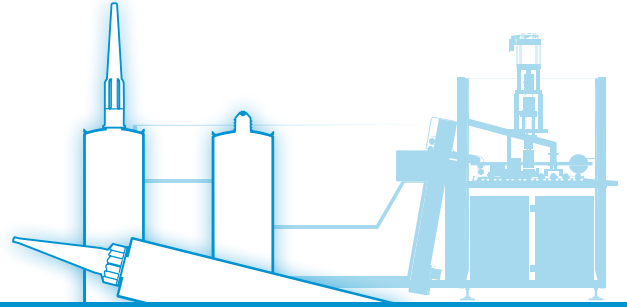

## Type K 28 LO

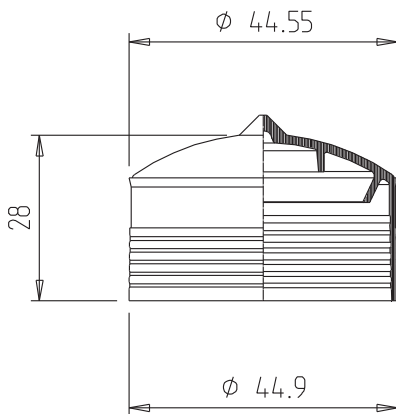

Plunger for use with Fischbach threaded cartridge E 280.

As a standard plunger, suitable for most sealants and for machine processing. The domed plunger floor makes it possible to operate the plunger without creating air pockets. Lips angled inwards cause the plunger to become enlarged when dispensing. This ensures that the cartridge is properly emptied, even with viscous materials.

Mechanical and pneumatic dispensing devices can be used for dispensing.

### TECHNICAL SPECIFICATIONS

<b>Material:</b>	HDPE
<b>Wall thickness:</b>	1,3 mm
<b>Weight:</b>	5,9 g
<b>Packaging unit:</b>	1400 pieces/box

Technical changes reserved.



**Fischbach KG**  
51766 Engelskirchen, Germany  
Telefon: +49 (0) 2263 6090  
Telefax: +49 (0) 2263 60358  
info@fischbach-fi.com

**Fischbach Korea Co., Ltd.**  
Songpa-Gu, Seoul, Korea  
Telefon: +82 2 425 3092  
Telefax: +82 2 425 3191  
korea@fischbach-fi.com

**Fischbach Ibérica, S.A.**  
17410 Sils (Girona), Spain  
Telefon: +34-972-16 84 87  
Telefax: +34-972-16 83 24  
spain@fischbach-fi.com

**Fischbach (Shanghai) Co., Ltd.**  
Shanghai, China 201708  
Telefon: +86-21-6979-1423  
Telefax: +86-21-6979-1426  
china@fischbach-fi.com

**Fischbach Belgium N.V.**  
9140 Temse, Belgium  
Telefon: +32-3-710 96 20  
Telefax: +32-3-710 96 31  
belgium@fischbach-fi.com

**Fischbach U.K. Ltd.**  
Cheshire WA7 1SN, Great Britain  
Telefon: +44-1928-579320  
Telefax: +44-1928-579403  
uk@fischbach-fi.com

**Fischbach USA Inc.**  
 Elizabethtown, Kentucky, 42701 USA  
Telefon: +1-270-7 69 93 33  
Telefax: +1-270-7 69 96 23  
usa@fischbach-fi.com